

S 60 corner

GSM.0200 | GSM.0300



Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)



Efficiëntie
Efficiency
Efficacité
Effizienz



Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)



Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)



Bovenaansluiting
Connection top
Raccordement dessus
Anschluss oben










Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss










Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2



GSM.0200
links/left/gauche

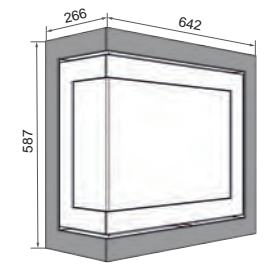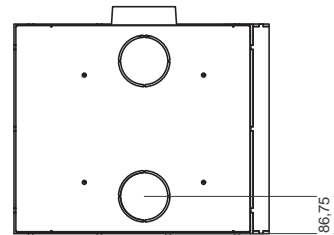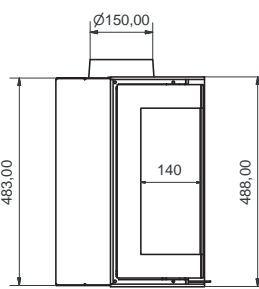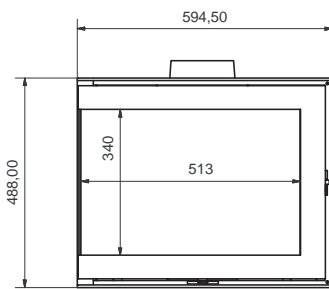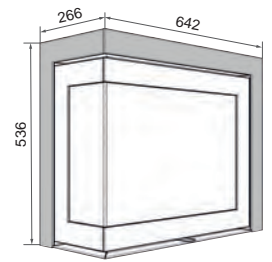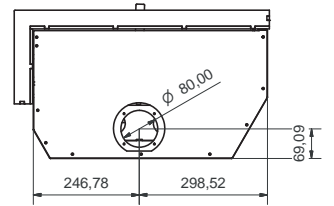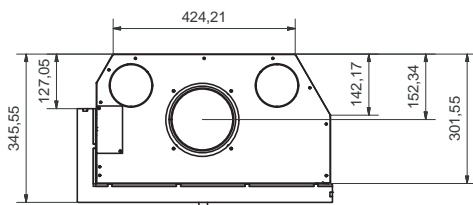

GSM.0300
rechts/right/droite

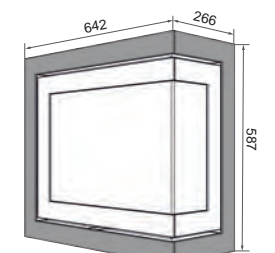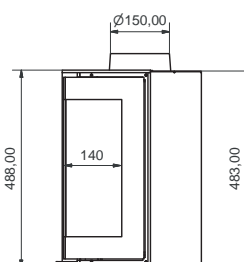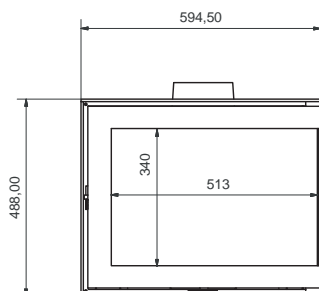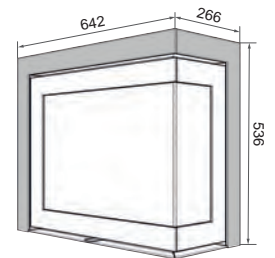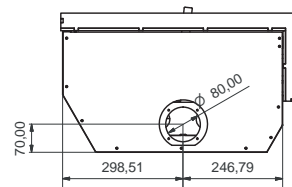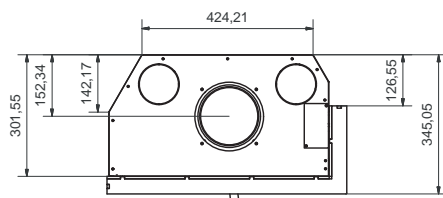

Wanders fires & stoves
Amtweg 4
7077 AL NETTERDEN
The Netherlands
Tel: +31 (0)315 - 386 414
Fax: +31 (0)315 - 386 201
info@wanders.nl
www.wanders.nl



wanders
fires & stoves